


Network Video Recorder

4 Channel - 4 POE - 2TB HDD

IPN42X




Dimensions

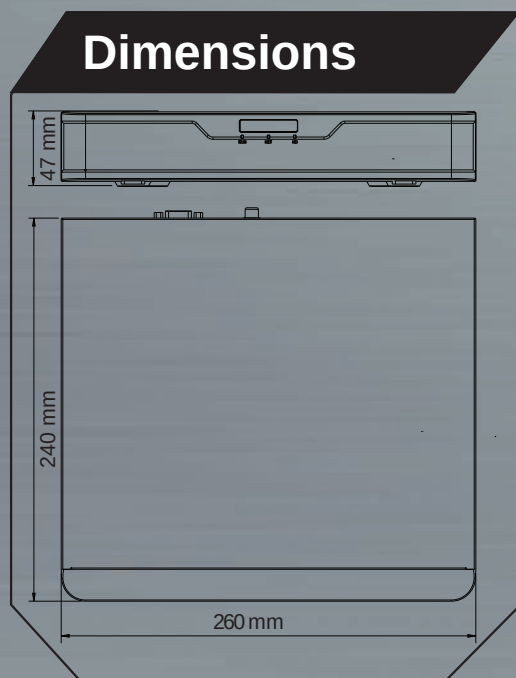

Key Features

- Supports Ultra 265/H.265/H.264 video formats
- 4 channel input
- 1-channel HDMI, 1-channel VGA
- HDMI and VGA simultaneous output
- Up to 4K resolution recording
- 1 SATA HDD up to 6TB
- Supports corridor mode
- Supports cloud upgrade

Rear Panel

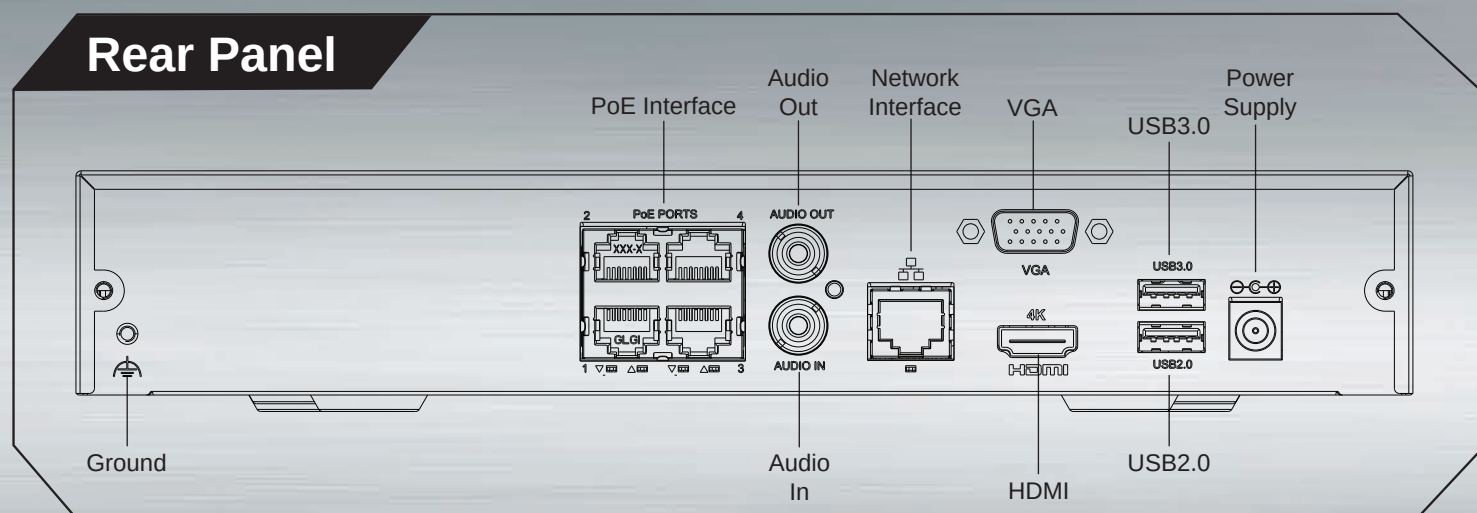

MODEL	IPN42X	
Video/Audio Input		
IP Video Input	4 Channels	
Two-way Audio Input	1 Channel, RCA	
Network		
Incoming Bandwidth	80 Mbps	
Outgoing Bandwidth	64 Mbps	
Remote Users	128	
Video/Audio Output		
HDMI / VGA Output	HDMI: 4K (3840x2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
	VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
Recording Resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Audio Output	1 Channel, RCA	
Synchronous Playback	4 Channels	
Decoding		
Compression	Ultra 265, H.265, H.264	
Live View/Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	2x4K@30, 3x5MP@30, 4x4MP@30	
Hard Disk		
SATA/Capacity	1 SATA Interface, Up to 6TB HDD	
Smart		
VCA Detection by Camera	Face Detection, Intrusion Detection, Cross-Line Detection, Auto Detection, Defocus Detection, Scence Change Detection, Auto Tracking, Object Left Behind, Object Removed	
External Interface		
Network Interface	1 RJ45 10M/100M Self-adaptive Ethernet Interface	
USB Interface	Rear panel: 1 x USB3.0, 1 x USB2.0	
PoE		
Interface	16 RJ-45 10M/100M Self-adaptive Ethernet Interface	
Max Power	Maximum 30 W for a single port, Maximum 54 W in total	
Supported Standard	IEEE 802.3af/3at	
General		
Power Supply	48 V DC	Power Consumption: ≤9 W (without HDD)
Dimensions (WxDxH)	260 x 240 x 47 mm	
Weight	1 Kg (without HDD)	
Working Environment	-10°C ~ +55°C, Humidity ≤90% RH (Non-condensing)	